

NEVER AGAIN WRAP POLISHING STRIPS OR SAWS AROUND YOUR FINGERS! STOP TRAUMATIZING SOFT TISSUE...





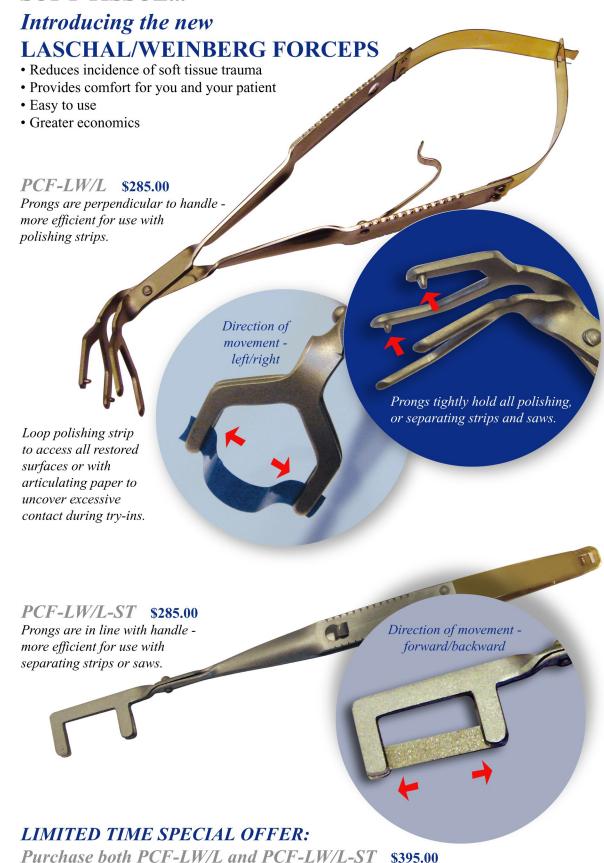

## A - For separating strips and saws

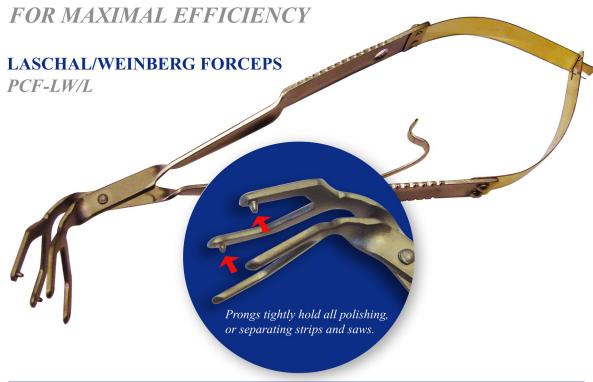

1 Cut a 1" length of strip 2 Place strip between and secure midway with a hemostat or pliers



prongs



3 Close instrument so that the lock engages



4 Notice that the pins have not yet penetrated strip on either side



5 Use hemostat or pliers to (gently) clamp down on one prong and make sure the pin has penetrated the strip on that side only



6 Use Hemostat to draw 7 Use hemostat to clamp 8 Notice fully closed, the strip taut on the opposite (unpenetrated)



down and penetrate opposite side



locked and penetrated strip (on both sides)



on both sides



9 Trim overhanging strip 10 The strip is now (very) tightly held and ready for use

## B - For polishing strips and articulating paper

Loop strip or paper (with greater or lesser loop, as desired) as shown

- 1 Once positioned, closing and locking the forceps (as in 3 above) usually completes penetration if not, finger pressure alone will complete penetration
- 2 Trim as in (9) above

